


Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.

This light should be installed by a licensed electrician

LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Slide the bottom glass into housing from top and place it on the flange, being careful not to touch or apply pressure to the LEDs or damage will occur.
3. Place top glass on brackets, secure with silicone washers and thumb screws.
4. Make appropriate electrical connections using wire nuts:
 - a. Connect the transformer's live wire (black) to the live outlet box wire.
 - b. Connect the transformer's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections and transformer in outlet box.
5. Attach the mounting plate to the outlet box, secure with outlet box screws.
6. Install the back plate to the mounting plate by hooking the bar inside the back plate behind the bottom bend on mounting plate, then tipping the back plate against the wall (Fig. B). Use Allen key (included) to tighten the set screws against the top bend on mounting plate.
7. Restore power to the fixture.

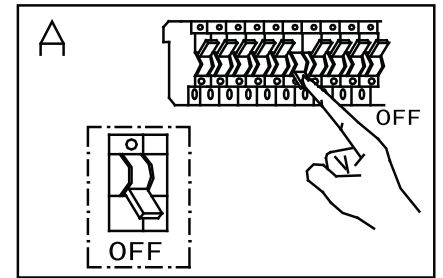

Note: This fixture is dimmable with Electronic Low Voltage (Trailing-Edge) type dimmers only.

CARE INSTRUCTIONS

Dusting – Use a clean, dry cloth.

Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

