

# LED Product Information and Warnings

## Important

- **Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**
- **Consult a qualified, licensed electrician to ensure correct branch circuit conductor.**
- Please read all included assembly instructions and warnings carefully before installation. Contact Customer Service if you have any questions or concerns. Before installation, please confirm that the fixture is compatible with your supply voltage and dimming system, if present.
- LEDs are highly sensitive electronic devices, and must be treated with care. Do not open any factory sealed compartments, and avoid touching the LEDs with your hands or any object.
- Although all our fixtures are equipped with protective devices, LED fixtures are vulnerable to power surges and supply variations. Do not install LED fixtures on the same circuit as any motors, appliances, or HVAC systems.
- Do not remove or bypass any LED Driver or Transformer that is provided with the fixture, and do not replace or substitute with another power supply.
- Remote LED Driver or Transformer installation must be done by a licensed electrician and in accordance with local codes. Remote installations should be in an accessible location, as close to the fixture as possible.
- Fixtures must be wired in parallel on independent leads; do not "daisy chain" multiple fixtures together or wire them in series.
- All factory-made splices and connections must remain intact. LED circuits are carefully designed and built, and improper connections may damage the fixture.
- The ends of coaxial pendant cords have been precisely stripped and split at the factory and must not be field cut. Excess cord or cable should be neatly coiled and reserved in the fixture canopy.
- Any mounting hardware is provided for your convenience and should be used with discretion. Always use the appropriate hardware for the mounting surface.

# Assembly Instructions

2643,2645



## INSTRUCTIONS D'INSTALLATION

Lotus Series - Pendant, Large Pendant

### Important

- Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.
- Consult a qualified, licensed electrician to ensure correct branch circuit conductor.
- *Consulter un électricien qualifié pour vous assurer que les conducteurs de la dérivation sont adéquats.*

1. Shut off power to the outlet box (A).
2. Attach the mounting plate (B) to the outlet box (A) using the outlet box screws (C).
3. Determine the height at which the fixture (D) is to be hung. Feed the fixture wires through the appropriate number of stem sections (E) for the desired length and screw them together and into the fixture.
4. Feed the fixture wires through the canopy (F) and screw the canopy onto the stem (E).
5. Loosen the screws on the safety cable coupling (G) and undo the loop. Pass the safety cable through a hole on the mounting plate (B) and insert the end back through the coupling to form a loop. Tighten the coupling screws to secure the safety cable (Fig. 1).
6. Make appropriate electrical connections using wire nuts:
  - a) Connect the fixture's (D) live wire (black) to the live outlet box wire.
  - b) Connect the fixture's (D) neutral wire (white) to the neutral outlet box wire.
  - c) Connect the fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate (B) using green screw (included).
  - d) Carefully place the connections in outlet box (A).
7. Install the canopy (F) to the mounting plate (B) using the finials (H).
8. Unscrew diffuser finials (J) and remove diffuser plate (K) from the fixture (D).
9. Install medium base bulbs (L) (60W max), and re-secure diffuser plate using diffuser finials (J).
10. Restore power to the fixture.

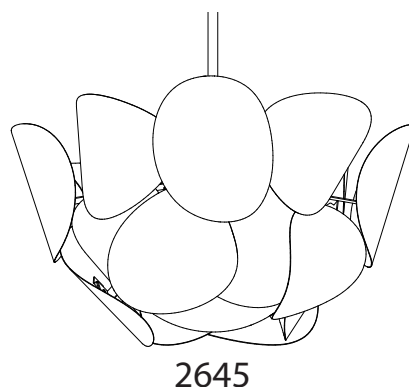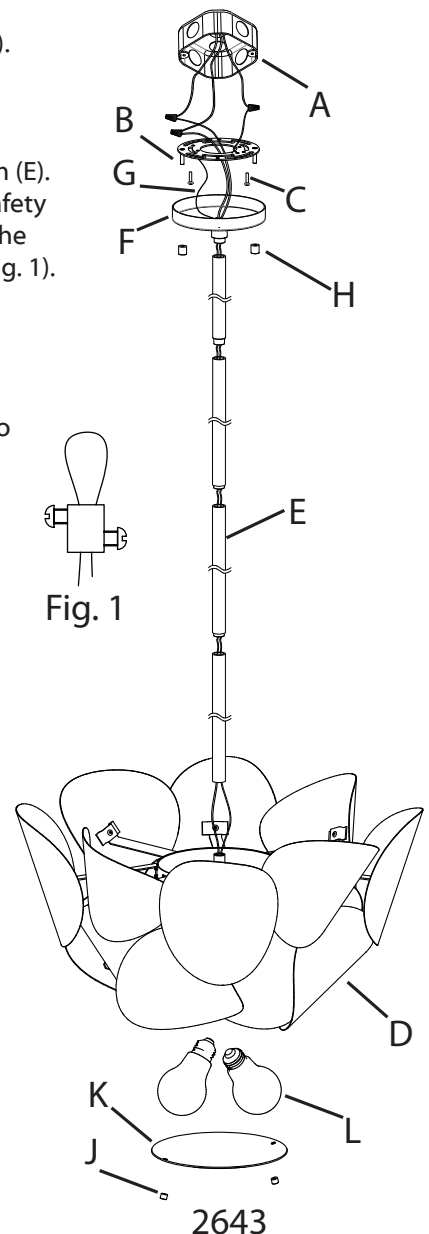

### Care Instructions

- **Dusting:** Use a clean, dry cloth.
- **Cleaning:** To protect the finish, avoid any harsh abrasives or chemicals.