


Important: Always disconnect the power before installing or replacing bulb and before cleaning or other maintenance.

This light should be installed by a licensed electrician




LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Feed the cords and cable through the stems, holes in glass, and grippers on canopy.
3. There are markings on the top of the LED housing, labeling the cords "A", "B", and "C".
 Connect the outer mesh wires of cords "A" and "C" to one of the red transformer wires.
 Connect the inner wires of cords "A" and "C" to the other red transformer wire. (Fig. 1)
4. Screw the stems into the holes on LED housing, and place the glass onto the shoulders on the stems.
5. Attach mounting plate to the outlet box, secure with outlet box screws.
6. Attach the safety hook in the canopy to one of the holes on the mounting plate.
7. Make appropriate electrical connections using wire nuts:
 - a. Connect the transformer's live wire (black) to the live outlet box wire.
 - b. Connect the transformer's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
8. Install canopy to mounting plate by inserting the pins on the canopy into slots on mounting plate. Slide the canopy to the side to lock.
9. Adjust the lengths of the cords and cables to level the fixture.
10. Restore power to the fixture.

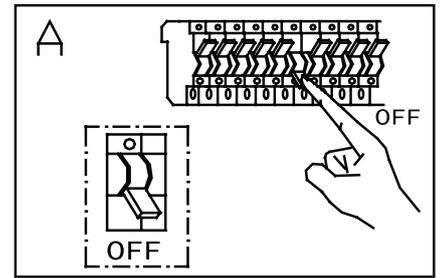

CARE INSTRUCTIONS

Dusting – Use a clean, dry cloth.
 Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

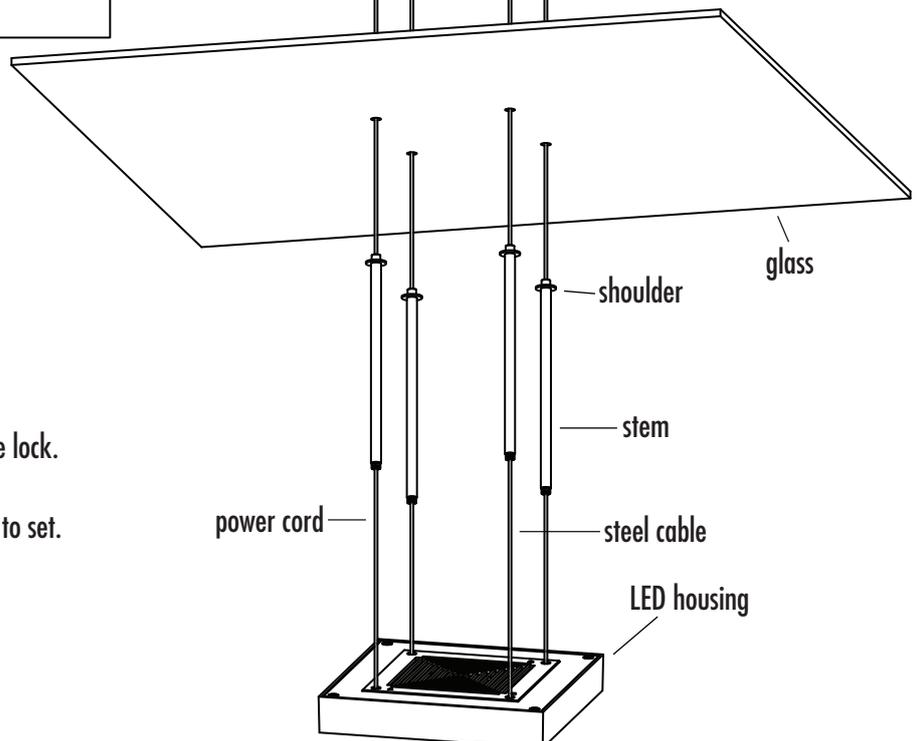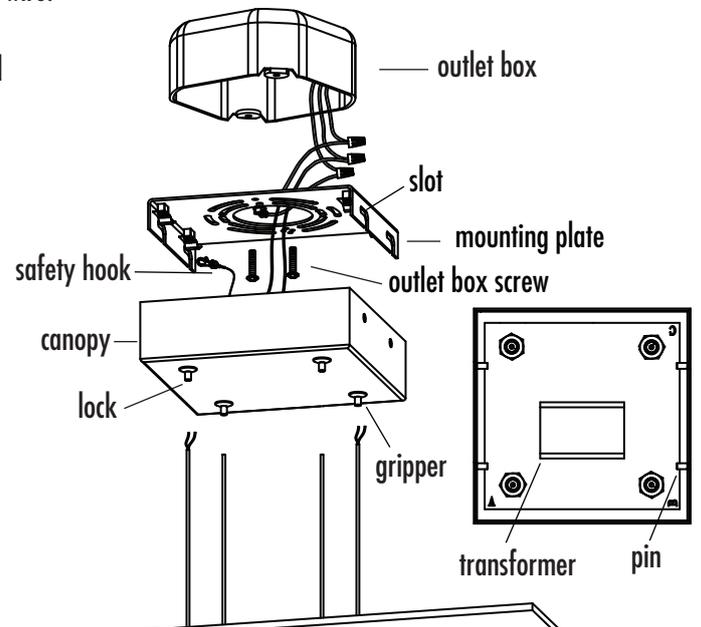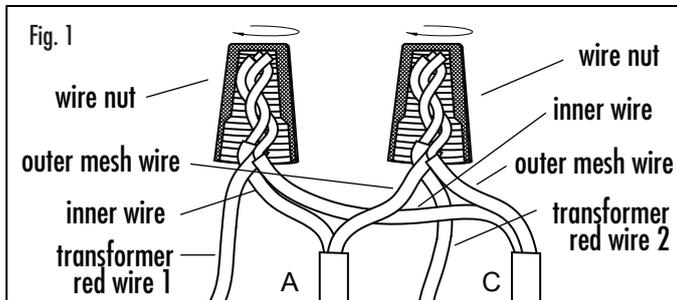

Note: This fixture is dimmable with Electronic Low Voltage (Trailing-Edge) type dimmers only.

Cord/Cable adjustment instructions:

- To shorten - Just push the cord/cable up, it will be locked automatically.
- To lengthen - Lift up on the cord/cable and push up on the lock. While keeping the lock depressed, lower the cable to the desired length. Release the lock to set.

