


**Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**

This light should be installed by a licensed electrician

### LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting plate to the outlet box, secure with outlet box screws.
3. Attach the safety hook in the canopy to one of the holes on the mounting plate.
4. Make appropriate electrical connections using wire nuts:
  - a. Connect the transformer's live wire (black) to the live outlet box wire.
  - b. Connect the transformer's neutral wire (white) to the neutral outlet box wire.
  - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
  - d. Carefully place connections in outlet box.
5. Install the canopy to the mounting plate by inserting the pins on the canopy into the slots on the mounting plate. Slide the canopy to the side to lock.
6. Restore power to the fixture.

**Note: This fixture is dimmable with Electronic Low Voltage (Trailing-Edge) type dimmers only.**

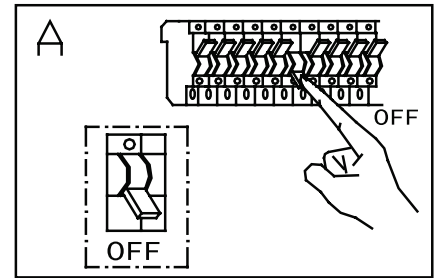

### CARE INSTRUCTIONS

- Dusting – Use a clean, dry cloth.  
 Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

