


**Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**

This light should be installed by a licensed electrician

### LAMP INSTALLATION AND ASSEMBLY

1. Unscrew the small screws and remove the canopy from the short stem.  
 Keep the small screws and canopy. (Fig. 1)
2. Unscrew the long screw, remove the stem block and the short stem, and pull the wire out of the short stem. Keep the long screw, stem block, and shade. (Fig. 1)
3. Shut off power to the outlet box. (fig. A)
4. Feed the wires in through the short slot on the stem and out the top end of the stem. (Fig. 2)
5. Insert the post on the shade into the long slot on the stem. Insert the long screw through the stem block and stem, and screw into the threaded hole on the post to secure the shade to the stem, being careful not to pinch the wires with the long screw. (Fig. 2)
6. Insert the wires and stem into the upper stem, and secure with the small screws.
7. Attach the mounting plate to the outlet box, secure with outlet box screws.
8. Make appropriate electrical connections using wire nuts:
  - a. Connect the fixture's live wire (black) to the live outlet box wire.
  - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
  - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
  - d. Carefully place connections in outlet box.
9. Attach the canopy to the mounting plate, secure with mounting screws.
10. Restore power to the fixture.

**NOTE: This fixture is dimmable with Electronic Low Voltage (Trailing-Edge) and Incandescent (Leading-Edge) type dimmers. For best performance, we recommend using an Electronic Low Voltage dimmer.**

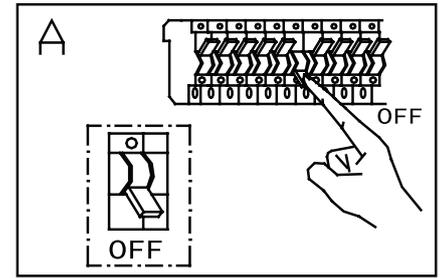

### CARE INSTRUCTIONS

- Dusting – Use a clean, dry cloth.
- Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

