


Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.

This light should be installed by a licensed electrician

LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting cover to the outlet box, secure with outlet box screws.
3. Attach the safety hook in the canopy to one of the holes on the mounting cover.
4. Make appropriate electrical connections using wire nuts:
 - a. Connect the LED driver's live wire (black) to the live outlet box wire.
 - b. Connect the LED driver's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
5. Install the canopy to the mounting cover by inserting the pins on the canopy into the slots on the mounting cover. Twist the canopy clockwise to lock.
6. Restore power to the fixture.

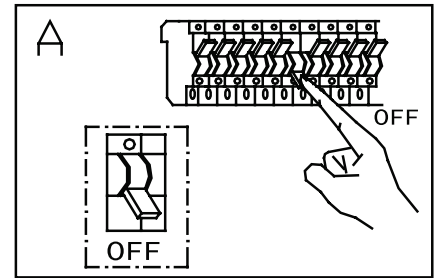

CARE INSTRUCTIONS

- Dusting – Use a clean, dry cloth.
- Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

NOTE: This fixture is controlled by the included IR remote control, which must be aimed at the sensor in the center of the canopy. The fixture may be turned on/off by a wall switch, but do not use with a wall dimmer, or damage will occur.

