


Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.

This light should be installed by a licensed electrician

LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting plate to the outlet box, secure with outlet box screws. And use additional anchors and wood screws for mounting (included).
3. Make appropriate electrical connections using wire nuts:
 - a. Connect the fixture's live wire (black) to the live outlet box wire.
 - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
4. Attach back plate to mounting plate, tighten with cap nuts. To install in a corner, mount in the orientation indicated on the sticker inside the back plate that reads, "Mount this side to the wall."
5. For 3010: Install (1) 14w T5 Linear Fluorescent.
 For 3011: Install (1) 21w T5 Linear Fluorescent.
 For 3012: Install (2) 14w T5 Linear Fluorescent.
 For 3013: Install (2) 21w T5 Linear Fluorescent.
6. Place top and bottom acrylic on the recess of the frame, place top and bottom glass on frame, secure with silicone washers and cap screws.
7. Restore power to the fixture.

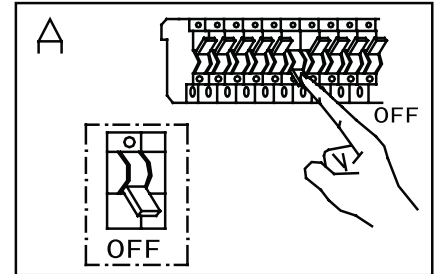

CARE INSTRUCTIONS

- Dusting – Use a clean, dry cloth.
 Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

