

**Important: Always disconnect the power before installing or replacing bulb and before cleaning or other maintenance.**

This light should be installed by a licensed electrician




### LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Determine the height at which the fixture is to be hung. Use the wrench (included) to loosen the set screw. (fig. B) Adjust the cord to the desired length. Tighten the set screw to set.
3. Reserve extra cord in the canopy, and adjust the cord lock so it is 12" from the canopy.
4. Attach the glass to the LED housing by placing the threaded pins through the holes in the glass, and screwing them into the threaded holes on the LED housing.
5. Make appropriate electrical connections using wire nuts:
  - a. Connect the transformer's live wire (black) to the live outlet box wire.
  - b. Connect the transformer's neutral wire (white) to the neutral outlet box wire.
  - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
  - d. Carefully place connections and transformer in outlet box.
6. Attach mounting plate to the outlet box, secure with outlet box screws.
7. Attach canopy to mounting plate, secure with canopy nuts.
8. Restore power to the fixture.


**Note: This fixture is dimmable with Electronic Low Voltage (Trailing-Edge) type dimmers only.**

### CARE INSTRUCTIONS

- Dusting – Use a clean, dry cloth.  
Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

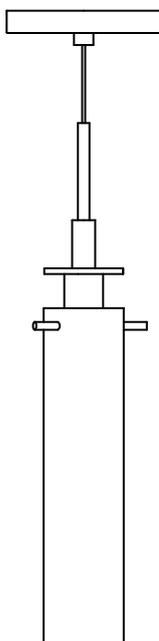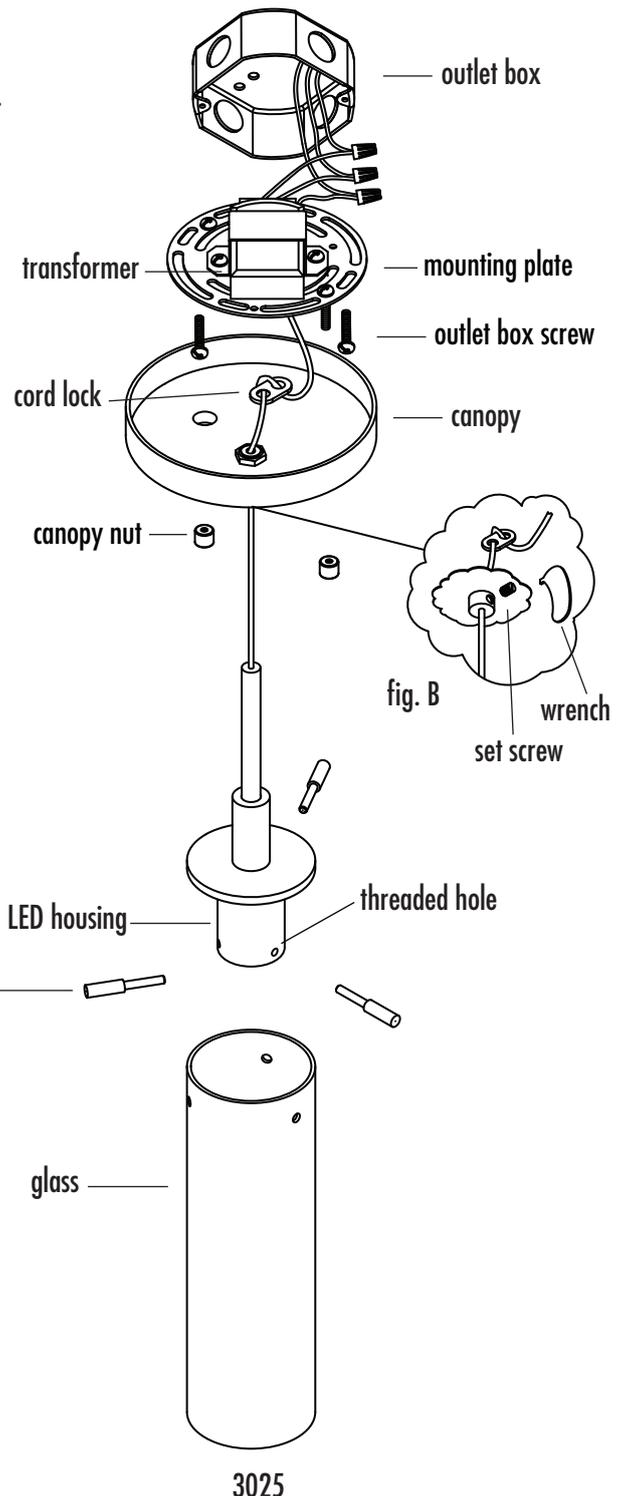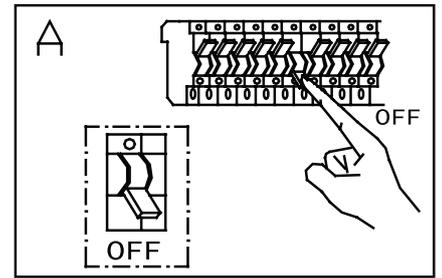

3027

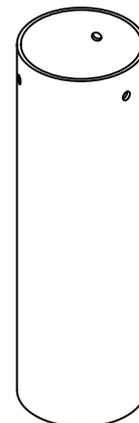

3025