


Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.

This light should be installed by a licensed electrician

CAUTION: Do not touch or apply pressure to the LEDs, or damage will occur.

LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting plate to the outlet box, secure with outlet box screws.
For 3213, 3214, 3215, Use anchors and wood screws for extra support (included)
3. Make appropriate electrical connections using wire nuts:
 - a. Connect the transformer's live wire (black) to the live outlet box wire.
 - b. Connect the transformer's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
4. Attach the back plate to the mounting plate, secure with cap nuts.
5. Onto the front threaded stems, place in order: plastic washer, large front glass, and another plastic washer. Tighten with spacers.
6. Then onto the front threaded stems, place in order: plastic washer, small front glass, and another plastic washer. Tighten with finials.
7. Onto the side threaded stems, place in order: plastic washer, side glass, and another plastic washer. Tighten with decorative rods.
8. Onto the bottom threaded stems, place in order: plastic washer, bottom glass, and another plastic washer. Tighten with finials.
9. Restore power to the fixture.

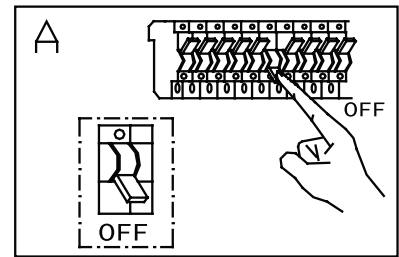

CARE INSTRUCTIONS

Dusting – Use a clean, dry cloth.
Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

Note: This fixture is dimmable with **Electronic Low Voltage (Trailing-Edge)** type dimmers only.

