

Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.

This light should be installed by a licensed electrician


CAUTION: Do not touch or apply pressure to the LEDs, or damage will occur.

LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Make appropriate electrical connections using wire nuts:
 - a. Connect the transformer's live wire (black) to the live outlet box wire.
 - b. Connect the transformer's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections and transformer in outlet box.
3. Attach the mounting plate to the outlet box, secure with outlet box screws.
4. Connect the male quick connector from the transformer to the female quick connector from the fixture. The quick connector is polarized and will only fit together the correct way. Do not force the connector together backwards or damage will occur.
5. Attach the canopy to the mounting plate, secure with finials.


For 3725, use additional anchors and wood screws for mounting (included).
6. Install metal shade to canopy by inserting the mounting posts on canopy into the key holes on metal shade, and twisting the metal shade clockwise to lock.
7. Restore power to the fixture.

Note: This fixture is dimmable with Electronic Low Voltage (Trailing-Edge) type dimmers only.

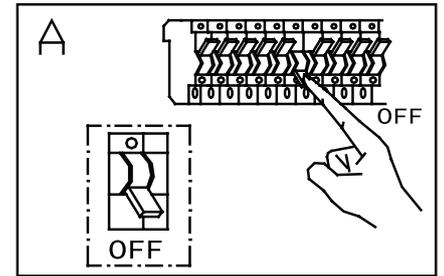


CARE INSTRUCTIONS


- Dusting – Use a clean, dry cloth.
 Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

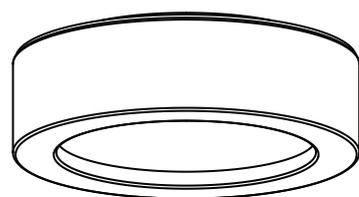

3723

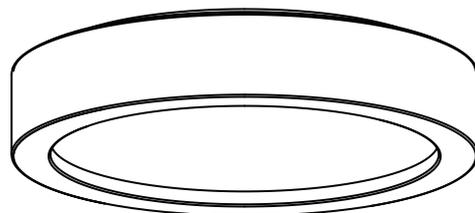

3724

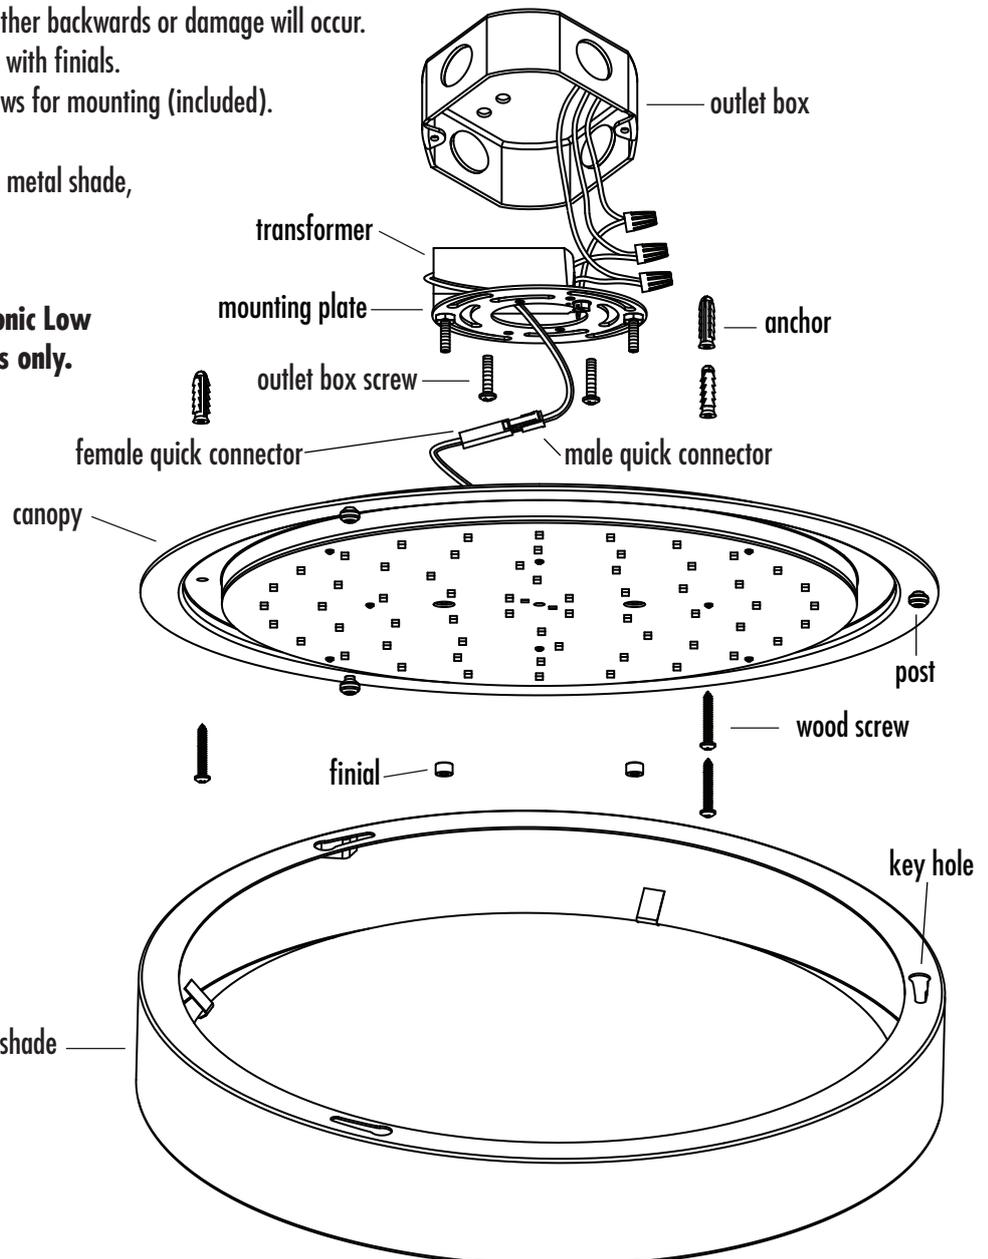

3725