


Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.

This light should be installed by a licensed electrician

LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting plate to the wall with anchors and wood screws (included).
3. Make appropriate electrical connections using wire nuts:
 - a. Connect the fixture's live wire (black) to the live outlet box wire.
 - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
4. Attach back plate to mounting plate, tighten with back plate screws.
5. Install 40W Xenon G9 bulbs, and screw explosion guards to the G9 sockets (included).
6. Place stud through silicone washer 1, holes in glass, and silicone washer 2. Tighten with cap nuts.
7. Restore power to the fixture.

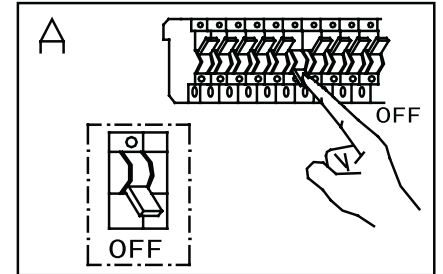

CARE INSTRUCTIONS

- Dusting – Use a clean, dry cloth.
Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

