


**Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**

This light should be installed by a licensed electrician

## LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting plate to the outlet box, secure with outlet box screws. Use anchors and wood screws for extra support (included)
3. Make appropriate electrical connections using wire nuts:
  - a. Connect the fixture's live wire (black) to the live outlet box wire.
  - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
  - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
  - d. Carefully place connections in outlet box.
4. Attach the back plate to the mounting plate, such that the springs inside the back plate are on top, and secure with cap nuts.
5. Install 40W Xenon G9 bulbs, and screw explosion guards onto G9 sockets (included).
6. Place the bottom edge of the glass into the slot on the bottom cover. Grasp the sides of the top cover, lift it up (Fig. B), and tip the glass forward to align the top edge of the glass with the slot in the top cover. Release the top cover to secure the glass.
7. Restore power to the fixture.

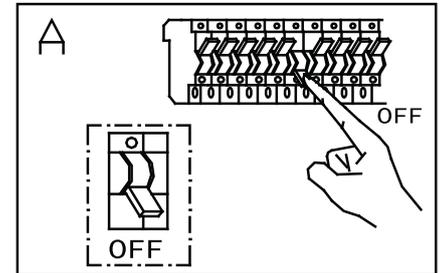

## CARE INSTRUCTIONS

- Dusting – Use a clean, dry cloth.  
Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

