


Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.

This light should be installed by a licensed electrician

LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting plate to the outlet box, secure with outlet box screws. Use additional anchors and wood screws for mounting (included)
3. Make appropriate electrical connections using wire nuts:
 - a. Connect the fixture's live wire (black) to the live outlet box wire.
 - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
4. Attach the canopy to the mounting plate, secure with mounting screws.
5. Install E12 Candelabra base bulbs (not included).
6. Attach the bottom glass and square cover to the square plate by placing bolts on square cover through the holes on bottom glass, square silicone washer and square plate, and tighten with cap nuts.
7. Place studs through silicone washer 1, holes in side glass, and silicone washer 2. Tighten with finials.
8. Restore power to the fixture.

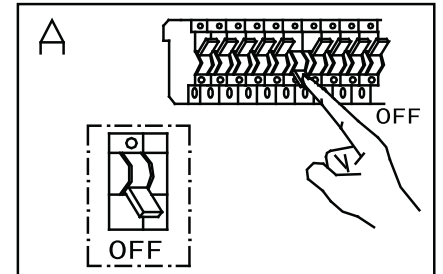

CARE INSTRUCTIONS

- Dusting – Use a clean, dry cloth.
Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

