

**Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**

This light should be installed by a licensed electrician




### LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (Fig A.)
2. Install Philips T10 bulbs (not included)
3. Position glass shade over socket cup, aligning the holes in the glass shade with the threaded holes in the socket cup. Secure glass shade with the three threaded pins.
4. Loosen strain relief in the canopy to adjust length of cable. Be sure to tie knots for the SVT wires in the canopy and secure the strain relief once the desired length is obtained.
5. Mount gem bar to outlet box using outlet box screws.
6. Make appropriate electrical connections using wire nuts:
  - a. Connect the fixture's live wire (black) to the live outlet box wire.
  - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
  - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
  - d. Carefully place connections in outlet box.
7. Attach canopy over outlet box threaded stem, tighten with canopy nut.
8. Restore power to fixture.


### CARE INSTRUCTIONS

Dusting – Use a clean, dry cloth.

Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

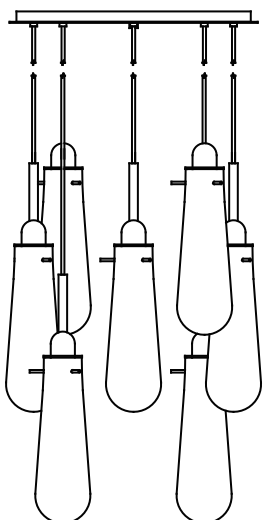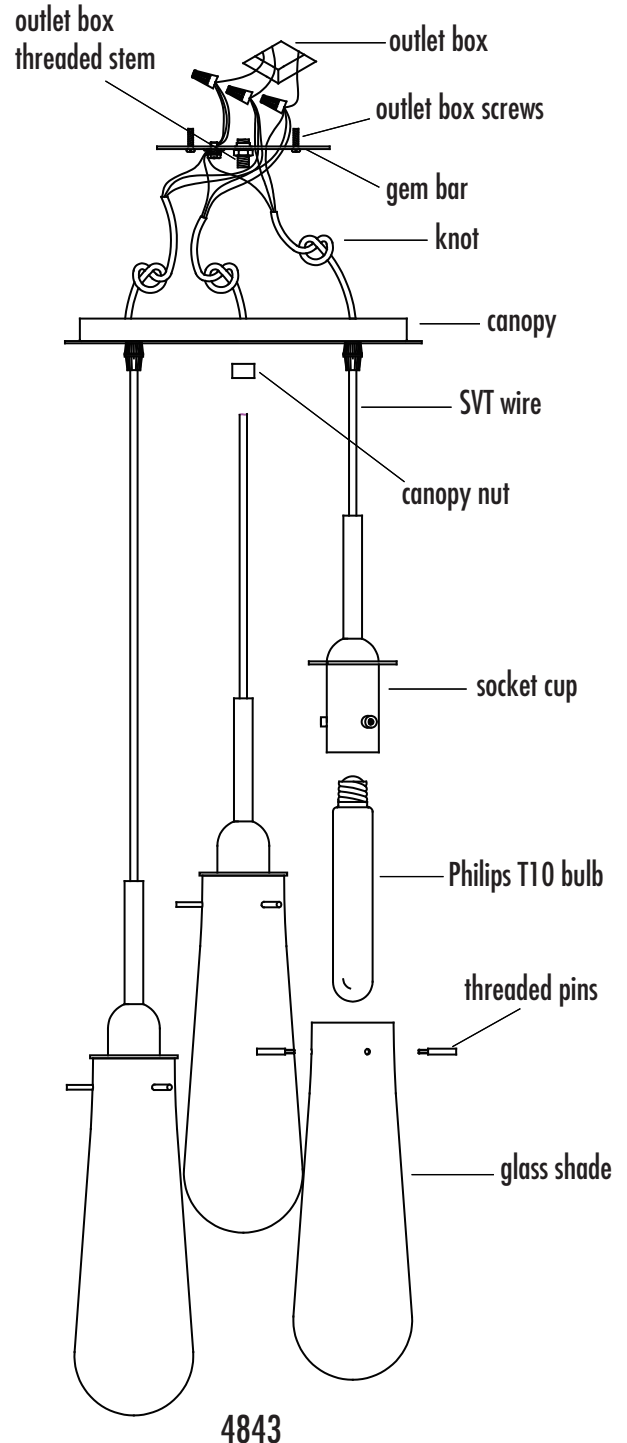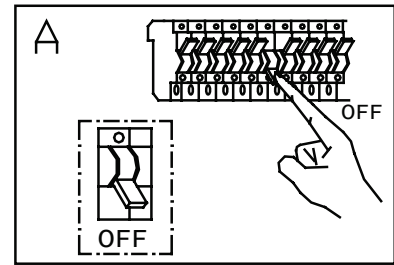

4848

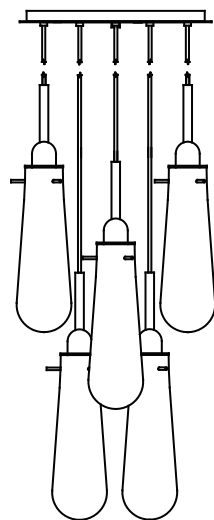

4845