

SONNEMAN - A WAY OF LIGHT

TEST REPORT

SCOPE OF WORK

Electrical and Photometric tests as required to the IESNA test standard.

MODEL NUMBER

7320

PROJECT NUMBER

G103703321

REPORT NUMBER

103703321CRT-014

ISSUE DATE

November 7, 2018

REVISION DATE

None

DOCUMENT CONTROL NUMBER

RTTDS-R-AMER-Test-3407

© 2018 INTERTEK



TEST REPORT**REPORT NO.: 103703321CRT-014****REPORT DATE: November 7, 2018****TEST OF (1) TRIFORM COMPACT LED SCONCE**

MODEL NO. 7320

RENDERED TO:

SONNEMAN - A WAY OF LIGHT
151 AIRPORT DRIVE
WAPPINGERS FALLS, NY 12590**STATEMENT OF LIMITATION**

NVLAP Lab Code 100402-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

AUTHORIZATION

The testing performed was authorized by signed quote number Qu-00924150.

STANDARDS USED

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

SAMPLE INFORMATION

| CONTROL NO. | MODEL/SERIAL NO. | DESCRIPTION | TYPE | RECEIVED |
|---------------------|------------------|-------------------------------|------------|-----------|
| CRT1811020954-001-2 | 7320 | Triform Compact LED Sconce | Production | 11/2/2018 |

DATE OF TESTS

November 6, 2018.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

REPORT NO.: 103703321CRT-014

REPORT DATE: November 7, 2018

SUMMARY

| | |
|-------------------------|----------------------------|
| MODEL NO: | 7320 |
| DESCRIPTION: | Triform Compact LED Sconce |
| LED MODEL NO: | Not Provided |
| DRIVER MODEL NO: | TDC LT12W120-48-C0250 |

| CRITERIA | RESULTS |
|------------------------------------|---------|
| Lumen Output (lumens) | 417.1 |
| Input Power (W) @ 120 (VAC) | 10.33 |
| Lumen Efficacy (lm/W) | 40.4 |
| Input Power Factor () @ 120 (VAC) | 0.988 |

EQUIPMENT LIST

| EQUIPMENT USED | MODEL NO. | CONTROL NO. | CAL DUE DATE | DATE USED |
|---|------------|-------------|--------------|-----------|
| LSI High Speed Mirror Goniometer | 6440 | --- | 12/6/2018 | 11/6/2018 |
| Elgar AC Power Supply | CW1251 | --- | VBU | 11/6/2018 |
| Sorenson DC Power Supply | XG 150-10 | --- | VBU | 11/6/2018 |
| Yokogawa Power Analyzer | WT210 | E464 | 5/3/2019 | 11/6/2018 |
| Omega Thermometer | DPi8-C24 | M263 | 5/3/2019 | 11/6/2018 |
| M-D Building Products Digital Level | Smart Tool | L112 | 4/21/2019 | 11/6/2018 |
| NIST Luminous Intensity Standard Source | NBS10322 | N1427 | 1/9/2019 | 11/6/2018 |
| NIST Luminous Intensity Standard Source | NBS10332 | N1435 | 1/9/2019 | 11/6/2018 |
| NIST Luminous Intensity Standard Source | NBS10265 | N1437 | 1/9/2019 | 11/6/2018 |
| NIST Luminous Flux Standard Source | NBS10428 | N1424 | 1/11/2019 | 11/6/2018 |

TEST REPORT**REPORT NO.: 103703321CRT-014****REPORT DATE: November 7, 2018****TEST METHODS****SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS**

No seasoning was performed in accordance with IESNA LM-79.

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD

A Type C Mirror Goniometer was used to measure the intensity (candelas) at each angle of distribution for the SSL sample.

Ambient temperature was measured equal to the height of the sample mounted on the goniometer equipment. The SSL sample was operated on the client provided driver at rated input volts in its designated orientation. The SSL sample was allowed to stabilize for at least thirty minutes before measurements were made. Stabilization procedures to LM-79 were followed. Electrical measurements including voltage, current, and power were measured using a power analyzer.

TEST REPORT

REPORT NO.: 103703321CRT-014
REPORT DATE: November 7, 2018


RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

| INTERTEK CONTROL NO. | BASE POSITION | INPUT VOLTAGE (VAC) | INPUT CURRENT (mA) | INPUT POWER (W) | INPUT POWER FACTOR () | LIGHT OUTPUT (lm) | LUMEN EFFICACY (lm/W) |
|----------------------|---------------|---------------------|--------------------|-----------------|------------------------|-------------------|-----------------------|
| CRT1811020954-001-2 | Base Down | 120.09 | 87.1 | 10.33 | 0.988 | 417.1 | 40.4 |

INTENSITY SUMMARY - CANDELAS

| Angle | 0 | 22.5 | 45 | 67.5 | 90 |
|-------|-----|------|-----|------|-----|
| 0 | 252 | 252 | 252 | 252 | 252 |
| 5 | 256 | 254 | 254 | 251 | 251 |
| 10 | 254 | 253 | 252 | 248 | 246 |
| 15 | 250 | 245 | 244 | 237 | 235 |
| 20 | 242 | 235 | 226 | 221 | 221 |
| 25 | 227 | 219 | 209 | 198 | 197 |
| 30 | 211 | 202 | 184 | 171 | 169 |
| 35 | 191 | 181 | 159 | 140 | 136 |
| 40 | 171 | 160 | 132 | 109 | 101 |
| 45 | 152 | 138 | 107 | 84 | 72 |
| 50 | 132 | 117 | 86 | 64 | 52 |
| 55 | 113 | 97 | 69 | 51 | 40 |
| 60 | 94 | 80 | 56 | 42 | 33 |
| 65 | 77 | 65 | 46 | 36 | 27 |
| 70 | 62 | 53 | 39 | 31 | 20 |
| 75 | 51 | 45 | 33 | 25 | 14 |
| 80 | 43 | 38 | 28 | 20 | 8 |
| 85 | 36 | 31 | 23 | 15 | 3 |
| 90 | 29 | 25 | 18 | 10 | 0 |
| 95 | 23 | 20 | 13 | 6 | 0 |
| 100 | 17 | 15 | 9 | 2 | 0 |
| 105 | 12 | 10 | 5 | 0 | 0 |
| 110 | 8 | 6 | 2 | 0 | 0 |
| 115 | 4 | 3 | 0 | 0 | 0 |
| 120 | 2 | 0 | 0 | 0 | 0 |

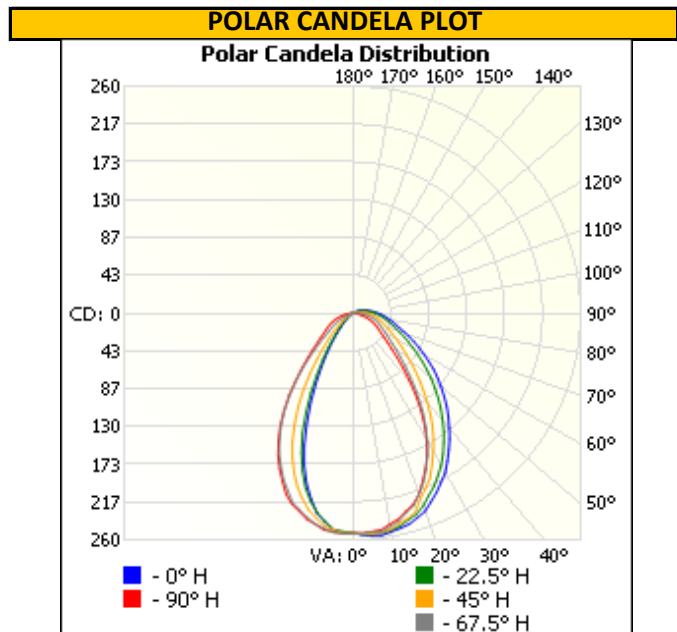


TEST REPORT

REPORT NO.: 103703321CRT-014

REPORT DATE: November 7, 2018

RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

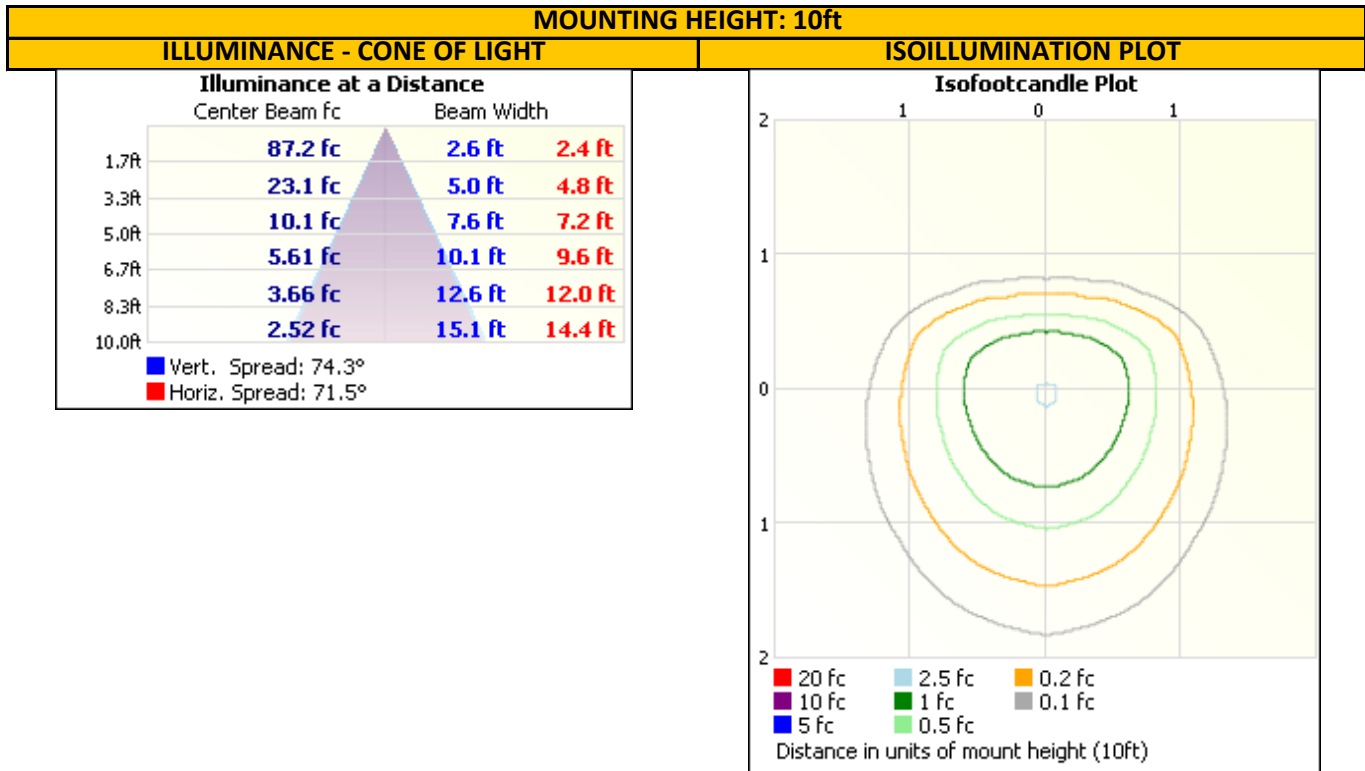

ZONAL LUMEN SUMMARY AND PERCENTAGES


| ZONE | LUMENS | % LUMINAIRE |
|--------|--------|-------------|
| 0-30 | 172.6 | 41.4 |
| 0-40 | 250.5 | 60.1 |
| 0-60 | 347.6 | 83.3 |
| 60-90 | 58.8 | 14.1 |
| 0-90 | 406.5 | 97.5 |
| 90-180 | 10.6 | 2.5 |
| 0-180 | 417.1 | 100.0 |

| ZONE | LUMENS | % LUMINAIRE |
|---------|--------|-------------|
| 0-10 | 23.8 | 5.7 |
| 10-20 | 64.7 | 15.5 |
| 20-30 | 84.1 | 20.2 |
| 30-40 | 77.9 | 18.7 |
| 40-50 | 57.5 | 13.8 |
| 50-60 | 39.6 | 9.5 |
| 60-70 | 27.7 | 6.6 |
| 70-80 | 18.9 | 4.5 |
| 80-90 | 12.3 | 2.9 |
| 90-100 | 6.9 | 1.7 |
| 100-110 | 3.0 | 0.7 |
| 110-120 | 0.7 | 0.2 |

TEST REPORT

REPORT NO.: 103703321CRT-014
REPORT DATE: November 7, 2018

PICTURES

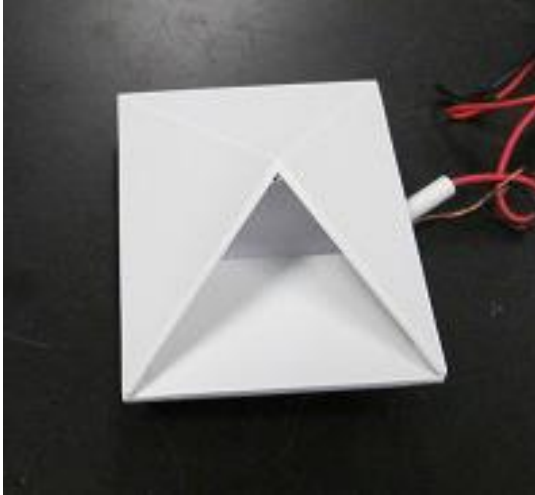

CONCLUSION

The results tabulated in this report are representative of the actual test samples submitted for this report only. The data is provided to the client for further evaluation. Compliance to the referenced specification requirements was not determined in this report.

In Charge Of Tests:

Gerald Gray
Associate Engineer
Lighting Division

Report Reviewed By:

Ryan Siddon
Project Engineer
Lighting Division

Attachments: IES File

REVISION HISTORY

| JOB NUMBER | DATE OF REVISION | PROJECT HANDLER | REVIEWED BY | REVISION NOTE |
|------------|------------------|-----------------|-------------|---------------|
| None | | | | |