


Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.

This light should be installed by a licensed electrician


LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the universal mounting plate to the outlet box, secure with outlet box screws.
3. Make appropriate electrical connections using wire nuts:
 - a. Connect the fixture's live wire (black) to the live outlet box wire.
 - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
4. Attach the canopy to the universal mounting plate, secure with canopy nuts.
5. For 3867: Install E12 Candelabra base bulbs. (not included)
 For 3868, 3869: Install medium base bulbs. (not included)
6. Place glass on canopy, align the holes on glass and glass bracket, then secure with silicone washers and square screws.
7. Restore power to the fixture.

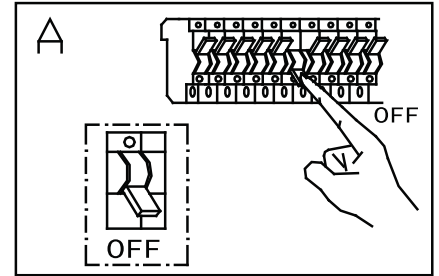


CARE INSTRUCTIONS


Dusting – Use a clean, dry cloth.
 Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

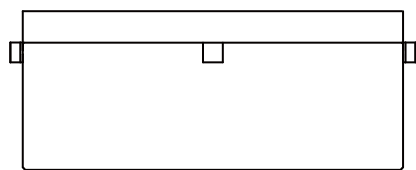

3868

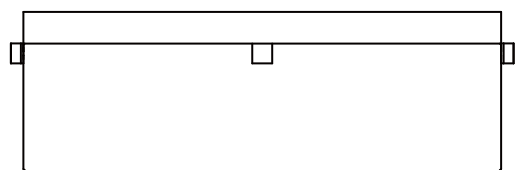

3869

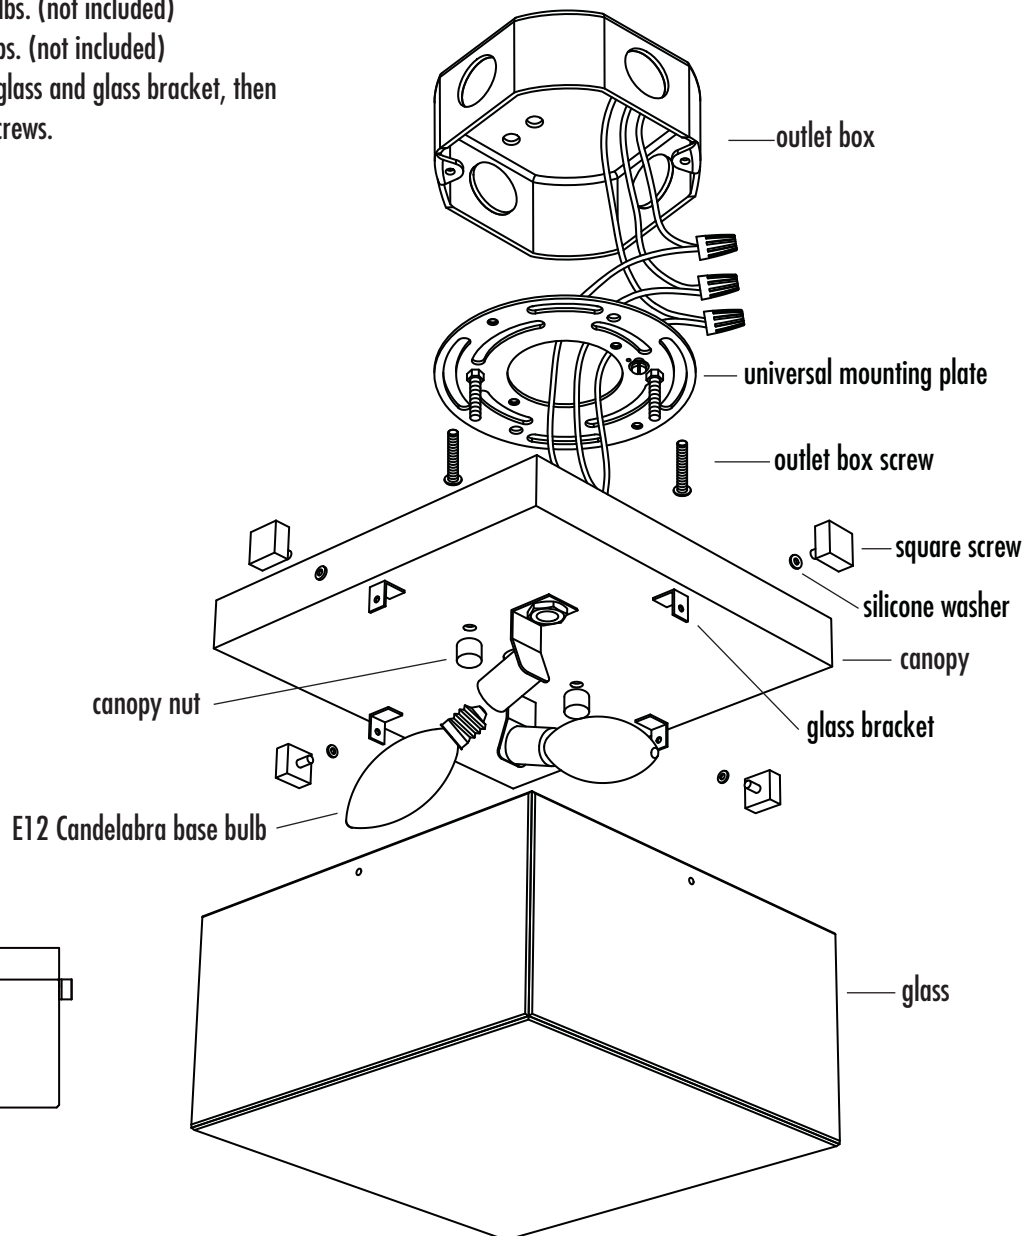

3867